


Technical data sheet

CL2008 profile rail, slot 11 mm, perforated

Item number: 1106627



Light-duty C profile rail for cable routing, in conjunction with series clips or clamp clips with N foot. Can also be used in building of control cabinets.  
Perforated, cannot be broken.



- St

Steel
- FS

Strip galvanized

| Master data                        |                         |
|------------------------------------|-------------------------|
| Item number                        | 1106627                 |
| Type                               | CL2008P2000FS           |
| Description 1                      | Profile rail            |
| Description 2                      | perforated, slot 11mm   |
| Manufacturer                       | OBO                     |
| Dimension                          | 2000x20x8               |
| Material                           | Steel                   |
| Surface                            | Strip galvanized        |
| Surface standard                   | DIN EN 10346            |
| Smallest sales unit                | 2                       |
| Unit of quantity                   | Metre                   |
| Weight                             | 20 kg                   |
| Weight unit                        | kg/100 m                |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,5147 kg COe / 1 Meter |


# Technical data sheet

## CL2008 profile rail, slot 11 mm, perforated

Item number: 1106627



### Dimensions

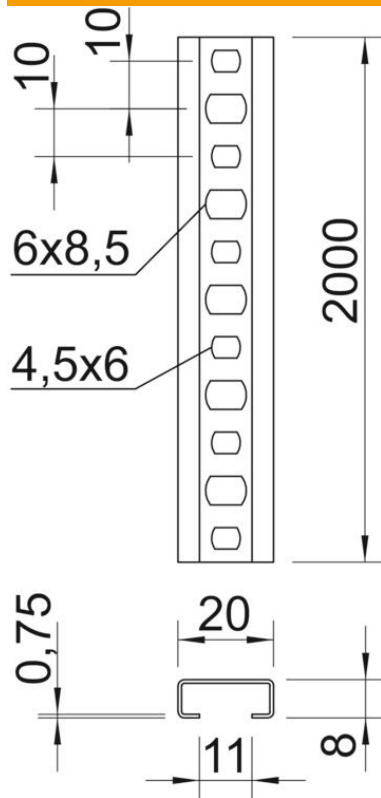

|             |          |
|-------------|----------|
| Length      | 2,000 mm |
| Width       | 20 mm    |
| Height      | 8 mm     |
| Dimension L | 2,000 mm |

### Technical data

|                               |                      |
|-------------------------------|----------------------|
| Breakable                     | no                   |
| Type of perforation           | Perforated back      |
| Version for                   | Single profile       |
| Drill hole spacing, centre    | 10 mm                |
| Bundle                        | 50 m                 |
| Maintain electrical functions | no                   |
| Material thickness            | 0.75 mm              |
| With perforation              | yes                  |
| With tothing                  | no                   |
| Profile shape                 | C profile            |
| Slot width                    | 11 mm                |
| Static value A                | 0.24 cm <sup>2</sup> |
| Static value Iy               | 0.02 cm              |
| Static value Iz               | 0.17 cm              |
| Static value Wy               | 0.05 cm <sup>2</sup> |
| Static value Wz               | 0.17 cm <sup>2</sup> |