


# Technical data sheet

Bend, angle-adjustable, 110 FT

Item number: 6037330

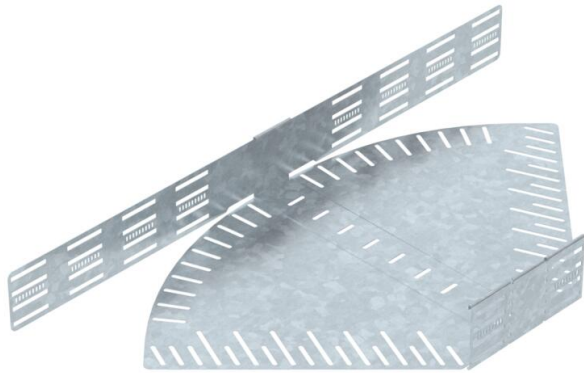

Angle-adjustable bend for the creation of a horizontal branch, fitting for lock and screw-on cable trays of side height 110 mm. Adjustable angle 0–90°. Screwless mounting with double clamps or screw connection with FRS truss-head screws and M6 combination nuts. Can be used indoors and outdoors. Fastening material must be ordered separately.



St

Steel

FT

Hot-dip galvanised

## Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 6037330                  |
| Type                               | RB W 150 FT              |
| Description 1                      | Adjustable bend          |
| Description 2                      | horizontal               |
| Manufacturer                       | OBO                      |
| Dimension                          | 110x500                  |
| Colour                             | zinc                     |
| Material                           | Steel                    |
| Surface                            | Hot-dip galvanised       |
| Surface standard                   | DIN EN ISO 1461          |
| Smallest sales unit                | 1                        |
| Unit of quantity                   | Piece                    |
| Weight                             | 373.1 kg                 |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 13,432 kg CO2e / 1 Piece |


# Technical data sheet

Bend, angle-adjustable, 110 FT

Item number: 6037330



## Dimensions

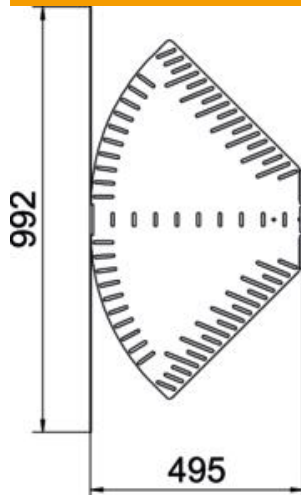

|                 |         |
|-----------------|---------|
| Width           | 500 mm  |
| Height          | 110 mm  |
| Plate thickness | 1.25 mm |
| Dimension B     | 500 mm  |
| Dimension L     | 992 mm  |

## Technical data

|                                         |                      |
|-----------------------------------------|----------------------|
| Bend (angle)                            | Adjustable           |
| Connector version                       | Integrated connector |
| Type                                    | Bend, rigid          |
| Maintain electrical functions           | no                   |
| Material thickness, floor plate         | 1.25 mm              |
| With cover                              | no                   |
| Mounting perforation in base            | yes                  |
| NATO hole pattern                       | no                   |
| Change of direction                     | Horizontal           |
| ROHS-conformant                         | yes                  |
| Rustproof steel, pickled                | no                   |
| Side perforation                        | yes                  |
| Permitted temperature range, max.       | 120 °C               |
| Permitted temperature range, min.       | -20 °C               |
| Wide-span version                       | no                   |
| Type of connector, cable support system | screwed/clamped      |
| Recommended quantity of bolts           | 24 St.               |
| Rail thickness                          | 1.25 mm              |